

Item Code: TATEX11013

Sponge Rubber

Suitable for underfloor heating*

Suitable for the floating installation of laminate and solid timber floors

Standard Specifications**	
Nominal square weight	2545 g/m ² (75 oz/yd ²)
Nominal roll weight	38.3 kg
Nominal roll area	15.07m ² (1.37m x 11.00m)
Nominal thickness	3.60 mm (0.14")

BS 5808: 1991 / EN14499 : 2015	
Mean original thickness from nominal thickness (Max.12%)	1.2 %
Difference between max. & min. original thickness (Max.3mm)	0.3 mm
Work of compression (Min. 50 J/m ² Max. 200 J/m ²)	57 J/m ²
Retention of work of compression (min 40%)	79 %
Compression after dynamic loading	2.2 mm
Breaking strength (length/width) min. 30N	242N / 106N
Extension under force (length/width) max. 15% @ 30N	0.5% / 0.6%
Loss in thickness after dynamic loading (max 15%)	4.7 %
Loss in thickness after static loading (max 15%)	7.7 %

Flammability	
Hot metal nut test (Not greater than 50mm)	Low radius of effects of ignition
Anti Flammability	Grade Level 1
Reaction to fire classification	Cfl-s1

Electrical Resistivity	
Vertical resistance, 25% RH	>10.0 x 10 12 ohms
Horizontal resistance, 25% RH	>5.0 x 10 14 ohms/cm ²
Vertical resistivity, 25% RH	>9.0 x 10 13 ohms/cm ²
Horizontal resistivity, 25% RH	>10.0 x 10 12 ohms

Barrier Properties	
Moisture resistance (g/m ² /24hrs@38°C/90%RH)	Typical Value: 1.5

Acoustic Sone wood/laminate flooring test	
Drum sound emission (overall loudness) (Sone)	56
Impact sound reduction (Delta Lw)	23 dB

Other Specifications	
Odour	No objectionable odour
Antimicrobial and mildew resistant	Yes
Colour / backing	Green / silver printed Vapourstop membrane
Packaging	Printed film, with printed insert
Thermal resistance	0.55 togs
Emissions (US Carpet & Rug Institute)	Meets low VOC emission criteria Certified GLP051 Cat CC10 Rubber

GREEN CREDENTIALS		
Green Features	Description	LEED Programme
Recyclable	At the end of the underlays useful life it can be 100% recycled	MR 2.0: Points Available It can be recycled
Recycled Content	Contains not less than 3% pre-consumer recycled material	MR 4.0: Points Available Recycled Content
Indoor Air Quality	Meets or exceeds the industry standard for indoor air quality as established by the CRI Green Label Programme	IEQ 4.3: Points Available Product is Green Label Certified
Regional Materials	Production Facility Haslingden BB4 4LS, UK Where used within 500 miles of Production Facility	MR 5.0: Points Available

LEED points must be considered along with other building components and must be determined by the specifier/architect or LEED accredited professional

* When installing underfloor heating please consult manufacturer's instructions regarding suitable tog ratings for their system. Not suitable for use with electric heating mats on top of a structural floor.


** The nominal roll dimensions have been quoted. These may vary slightly but will comply with the requirements of BS EN 14499:2015

Interfloor Limited strives to improve its product quality and reserves the right to change specification without notice.



The sub-floor must be level sound, dry and free from dust, grease and other contaminants.


Any loose floorboards must be nailed down and any protruding nails hammered down.



The underlay should be laid foil side up allowing a 5cm excess of underlay to run up the perimeter wall. Each roll of underlay should be closely butted-up.




Tape all joints with a suitable single sided moisture proof tape† and press firmly into place.



Once the Laminate or Wood flooring has been fully laid, trim the underlay around the perimeter of the room flush with the flooring, fit skirting or quadrant to finish.

† Single sided moisture proof tape (Vapour Tape 6450) used in conjunction with the underlay, creates a new, moisture-resistant sub-floor onto which the wood or laminate flooring is fitted (in accordance with the manufacturer's recommendations).

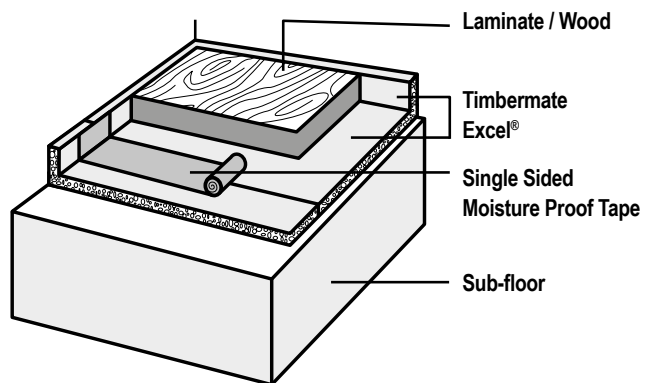

Duralay®

Underlay Experts Since 1952

16/ 03/ 2021

Interfloor Ltd
Broadway, Haslingden,
Rossendale, Lancashire,
BB4 4LS

Sales Tel: +44 (0)1706 238810
www.interfloor.com

International T: +44 (0)1706 238825
international@interfloor.com

Estillon B.V.
Linie 25, 5405 AR UDEN
The Netherlands

Tel: +31 413 427427
www.estillon.com
Estillon is part of Interfloor Group Ltd.